


HAUD LED1X1650/1050 J413 T840 OP LT80 F... (FELT COLOR CODE) • 1121624

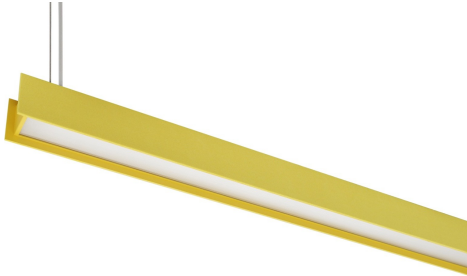

Product:	Haud LED1x1650/1050 J413 T840 OP LT80 F... (felt color code)
Order code:	1121624
Family:	Haud LED
Product group:	Acoustic luminaires

GENERAL DATA

Description:	Acoustic suspended decorative LED luminaire Light distribution type: direct/indirect Optical system: opal polycarbonate diffuser Housing: aluminium Colour: made to the customer's specification
Installation:	Suspended (wire and cap to be ordered separately). Cable 2.0m, 3x0.75mm ² , transparent
Environment	Indoor
Application	office, education, retail, public place, hotel

ELECTRICAL DATA

Mains voltage:	220-240V, 0/50/60Hz	System power*, W:	21
Power factor:	>0,95	Control gear:	ECG on/off
Integrated sensor:	None	Connection:	Cable 2.0m, 3x0.75mm ² , transparent

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm(ta+25°C):	2644	System efficacy, lm/W:	125
CRI (Ra):	80+	CCT, K:	4000
SDCM:	3	Light Distribution:	Wide-wide beam (C0-C180 plane 76 ...125 , C90-C270 plane 76 ...125)
Distribution Type:	Direct/indirect (60/40)	Beam angle, °:	109x109
LED lifetime, h:	100000/L80B50	Ripple current (≤120 Hz), %:	≤3


TECHNICAL DATA

Net weight, kg:	3.9	Quantity in package, pcs:	1
Packaging volume, m³/pcs:	0.0078		
Dimensions, mm:	1159x65x99		

STANDARDS

Operating temperature range, °C:	ta 0...+35	Protection class IEC:	I
Ingress protection code:	IP40	Mechanical impact resistance:	IK05
EEC:	E	Certificates:	CE, RoHS
Warranty:	3 years		

Technical drawing (.jpg)

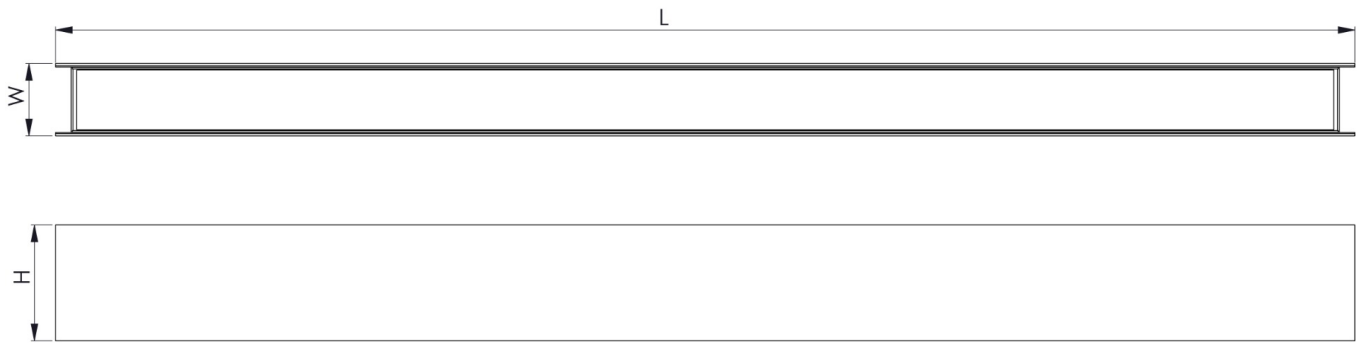

Note:

Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Date of issue: 2023-11-02 ■ NORTHCLIFFE LIGHTING, UAB ■ Raudondvario pl. 101, LT-47184 Kaunas, Lithuania ■ info@northcliffe.org ■ www.northcliffe.org