


ETESIAN U LED

Surface and Suspended Luminaires



Images for the product family and options:



Description: Suspended LED luminaire
Light distribution type: direct (optional direct/indirect LG3 versions)
Optical system: double parabolic reflector with lenses, low glare
Housing: steel
Colour: white RAL 9003S

General data: Mains voltage: 220-240V, 0/50-60Hz
LED lifetime, h: 100000/L80B10
SDCM: 3
Protection class IEC: I
Ingress protection code: IP40
Mechanical impact resistance: IK05
Operating temperature range, °C: ta 0...+35

Installation: Suspended (wire, cable and cap to be ordered separately). Push-in terminal, 3x2x2.5mm2

Environment: Indoor

Application: Office, education, retail, public place



Sensors ensure lighting is only on when and where it is needed. The sensors can bring huge benefits in terms of energy management as they enable sunlight harvesting, automatic dimming, and sensing the presence of people. The lighting is only on when actually required so cost savings are considerable. Energy saving - typically between 30% and 50%. Application: are ideal for all office areas including work spaces, conference rooms, corridors, break-out rooms, administrative areas, stairwells and similar applications in schools and hospitals. For more information see the option list and energy saving solutions.

LG3 – Luminaire fits to LG3 requirements with 30-40% light distribution to the ceiling and 70-60% to the floor. For more information see the option list.


Product	Length, mm	Width, mm	Height, mm	Luminaire output, lm	System power, W	System efficacy, lm/W	CRI	CCT, K	Weight, kg
Etesian U LED1x2950 J102 T830 WGC LO1	1245	47	60	2770	17,6	157	80+	3000	2,3
Etesian U LED1x3600 J103 T830 WGC LO2	1245	47	60	3399	21,9	155	80+	3000	2,3
Etesian U LED1x4250 J104 T830 WGC LO3	1245	47	60	4006	26,1	153	80+	3000	2,3
Etesian U LED1x4900 J105 T830 WGC LO4	1245	47	60	4617	30,8	150	80+	3000	2,3
Etesian U LED1x3650 J106 T830 WGC LO1	1524	47	60	3463	21,7	160	80+	3000	2,6
Etesian U LED1x4500 J107 T830 WGC LO2	1524	47	60	4249	26,8	159	80+	3000	2,6
Etesian U LED1x5300 J108 T830 WGC LO3	1524	47	60	5008	32,0	157	80+	3000	2,6
Etesian U LED1x6150 J109 T830 WGC LO4	1524	47	60	5831	37,8	154	80+	3000	2,6
Etesian U LED1x5850 J110 T830 WGC LO1	2424	47	60	5540	33,3	166	80+	3000	4,0
Etesian U LED1x7200 J111 T830 WGC LO2	2424	47	60	6798	41,9	162	80+	3000	4,0
Etesian U LED1x8450 J112 T830 WGC LO3	2424	47	60	8012	50,6	158	80+	3000	4,0
Etesian U LED1x9750 J113 T830 WGC LO4	2424	47	60	9235	59,0	157	80+	3000	4,0
Etesian U LED1x7300 J114 T830 WGC LO1	2982	47	60	6926	41,6	166	80+	3000	4,7
Etesian U LED1x9000 J115 T830 WGC LO2	2982	47	60	8498	52,4	162	80+	3000	4,7
Etesian U LED1x10600 J116 T830 WGC LO3	2982	47	60	10016	62,6	160	80+	3000	4,7
Etesian U LED1x12300 J117 T830 WGC LO4	2982	47	60	11663	73,3	159	80+	3000	4,7
Etesian U LED1x2950 J102 T840 WGC LO1	1245	47	60	2920	17,6	166	80+	4000	2,3
Etesian U LED1x3600 J103 T840 WGC LO2	1245	47	60	3583	21,9	164	80+	4000	2,3
Etesian U LED1x4250 J104 T840 WGC LO3	1245	47	60	4223	26,1	162	80+	4000	2,3
Etesian U LED1x4900 J105 T840 WGC LO4	1245	47	60	4867	30,8	158	80+	4000	2,3
Etesian U LED1x3650 J106 T840 WGC LO1	1524	47	60	3650	21,7	168	80+	4000	2,6
Etesian U LED1x4500 J107 T840 WGC LO2	1524	47	60	4479	26,8	167	80+	4000	2,6
Etesian U LED1x5300 J108 T840 WGC LO3	1524	47	60	5278	32,0	165	80+	4000	2,6
Etesian U LED1x6150 J109 T840 WGC LO4	1524	47	60	6147	37,8	163	80+	4000	2,6
Etesian U LED1x5850 J110 T840 WGC LO1	2424	47	60	5840	33,3	175	80+	4000	4,0

Product	Length, mm	Width, mm	Height, mm	Luminaire output, lm	System power, W	System efficacy, lm/W	CRI *	CCT, K	Weight, kg
Etesian U LED1x5300 J108 T840 MMC LO3	1524	47	60	5395	32,0	169	80+	4000	2,6
Etesian U LED1x6150 J109 T840 MMC LO4	1524	47	60	6282	37,8	166	80+	4000	2,6
Etesian U LED1x5850 J110 T840 MMC LO1	2424	47	60	5968	33,3	179	80+	4000	4,0
Etesian U LED1x7200 J111 T840 MMC LO2	2424	47	60	7323	41,9	175	80+	4000	4,0
Etesian U LED1x8450 J112 T840 MMC LO3	2424	47	60	8631	50,6	171	80+	4000	4,0
Etesian U LED1x9750 J113 T840 MMC LO4	2424	47	60	9948	59,0	169	80+	4000	4,0
Etesian U LED1x7300 J114 T840 MMC LO1	2982	47	60	7460	41,6	179	80+	4000	4,7
Etesian U LED1x9000 J115 T840 MMC LO2	2982	47	60	9154	52,4	175	80+	4000	4,7
Etesian U LED1x10600 J116 T840 MMC LO3	2982	47	60	10789	62,6	172	80+	4000	4,7
Etesian U LED1x12300 J117 T840 MMC LO4	2982	47	60	12564	73,3	171	80+	4000	4,7
Etesian U LED1x2950 J102 T830 WAC LO1	1245	47	60	2283	17,6	130	80+	3000	2,3
Etesian U LED1x3600 J103 T830 WAC LO2	1245	47	60	2802	21,9	128	80+	3000	2,3
Etesian U LED1x4250 J104 T830 WAC LO3	1245	47	60	3302	26,1	127	80+	3000	2,3
Etesian U LED1x4900 J105 T830 WAC LO4	1245	47	60	3805	30,8	124	80+	3000	2,3
Etesian U LED1x3650 J106 T830 WAC LO1	1524	47	60	2854	21,7	132	80+	3000	2,6
Etesian U LED1x4500 J107 T830 WAC LO2	1524	47	60	3502	26,8	131	80+	3000	2,6
Etesian U LED1x5300 J108 T830 WAC LO3	1524	47	60	4127	32,0	129	80+	3000	2,6
Etesian U LED1x6150 J109 T830 WAC LO4	1524	47	60	4806	37,8	127	80+	3000	2,6
Etesian U LED1x5850 J110 T830 WAC LO1	2424	47	60	4566	33,3	137	80+	3000	4,0
Etesian U LED1x7200 J111 T830 WAC LO2	2424	47	60	5603	41,9	134	80+	3000	4,0
Etesian U LED1x8450 J112 T830 WAC LO3	2424	47	60	6604	50,6	131	80+	3000	4,0
Etesian U LED1x9750 J113 T830 WAC LO4	2424	47	60	7611	59,0	129	80+	3000	4,0
Etesian U LED1x7300 J114 T830 WAC LO1	2982	47	60	5708	41,6	137	80+	3000	4,7
Etesian U LED1x9000 J115 T830 WAC LO2	2982	47	60	7004	52,4	134	80+	3000	4,7
Etesian U LED1x10600 J116 T830 WAC LO3	2982	47	60	8255	62,6	132	80+	3000	4,7
Etesian U LED1x12300 J117 T830 WAC LO4	2982	47	60	9612	73,3	131	80+	3000	4,7
Etesian U LED1x2950 J102 T840 WAC LO1	1245	47	60	2407	17,6	137	80+	4000	2,3
Etesian U LED1x3600 J103 T840 WAC LO2	1245	47	60	2953	21,9	135	80+	4000	2,3
Etesian U LED1x4250 J104 T840 WAC LO3	1245	47	60	3480	26,1	133	80+	4000	2,3
Etesian U LED1x4900 J105 T840 WAC LO4	1245	47	60	4011	30,8	130	80+	4000	2,3
Etesian U LED1x3650 J106 T840 WAC LO1	1524	47	60	3008	21,7	139	80+	4000	2,6
Etesian U LED1x4500 J107 T840 WAC LO2	1524	47	60	3691	26,8	138	80+	4000	2,6
Etesian U LED1x5300 J108 T840 WAC LO3	1524	47	60	4350	32,0	136	80+	4000	2,6
Etesian U LED1x6150 J109 T840 WAC LO4	1524	47	60	5066	37,8	134	80+	4000	2,6
Etesian U LED1x5850 J110 T840 WAC LO1	2424	47	60	4813	33,3	145	80+	4000	4,0
Etesian U LED1x7200 J111 T840 WAC LO2	2424	47	60	5906	41,9	141	80+	4000	4,0
Etesian U LED1x8450 J112 T840 WAC LO3	2424	47	60	6961	50,6	138	80+	4000	4,0
Etesian U LED1x9750 J113 T840 WAC LO4	2424	47	60	8022	59,0	136	80+	4000	4,0
Etesian U LED1x7300 J114 T840 WAC LO1	2982	47	60	6016	41,6	145	80+	4000	4,7
Etesian U LED1x9000 J115 T840 WAC LO2	2982	47	60	7382	52,4	141	80+	4000	4,7
Etesian U LED1x10600 J116 T840 WAC LO3	2982	47	60	8701	62,6	139	80+	4000	4,7
Etesian U LED1x12300 J117 T840 WAC LO4	2982	47	60	10132	73,3	138	80+	4000	4,7

*Tolerance range for optical and electrical data: $\pm 10\%$. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Available options:

T830	Colour temperature 3000K, CRI 80+	COR30min	Driver with Corridor function 30min (switch off after 30 min.)
T840	Colour temperature 4000K, CRI 80+	PULL	Pull switch device, on/off
WGC	White gloss reflector with clear lens	PULLDIM	Pull switch device and driver with switch-control dimming
BGC	Black gloss reflector with clear lens	PIR	Integrated PIR sensor with on-off control
WMC	White matt reflector with clear lens	EM3	Emergency version 3 hours
BMC	Black matt reflector with clear lens	EM3B	Emergency version 3 hours (best available technology)
MGC	Metallic mirror finish reflector with clear lens	EM3A	Emergency version equipped with an autonomous testing system, 3 hours
MMC	Metallic matt reflector with clear lens	EM3D	Emergency version 3 hours with DALI interface
WAC	Metallic mirror finish asymmetrical reflector with white shade and clear lens	CBF3-2.0m clear	Cable 3x0.75mm ² for suspended luminaire up to 2.0 meters, transparent
BAC	Metallic mirror finish asymmetrical reflector with black shade and clear lens	CBF3-3.0m clear	Cable 3x0.75mm ² for suspended luminaire up to 3.0 meters, transparent
LO1...4	Light output level 1 to 4	CBF5-2.0m clear	Cable 5x0.75mm ² for suspended luminaire up to 2.0 meters, transparent
DALI	Driver with DALI interface and switch-control dimming	CBF5-3.0m clear	Cable 5x0.75mm ² for suspended luminaire up to 3.0 meters, transparent
EAIRB-M	Master luminaire with integrated smart sensor and driver with Bluetooth communication and grouping possibilities for lighting control	1LIN I-join L	Luminaire designed to in-line connection with join element - end/first luminaire (joint element not included). Through wired 3x1.5 mm ² with two push-in terminal blocks
	*note - for EAIRB, EAIRB-M options ingress protection IP20	1LIN I-join LL	Luminaire designed to in-line connection with join element - intermediate luminaire (joint element not included). Through wired 3x1.5 mm ² with two push-in terminal blocks
	*note - the EAIRB sensor is positioned in the end of the luminaire for lengths up to 2000mm, and in the middle of the luminaire for lengths over 2000mm	RAL	RAL colour
	EAIRB-S		
	Slave luminaire with integrated EAIR type driver for lighting control		
	*note - max system size 1x EAIRB-M + 3x EAIRB-S.		
	*note - max wire length from EAIRB-M to last EAIRB-S - 11m.		
BLT	Integrated wireless control unit and driver for lighting control via mobile device (via Bluetooth)		
COR	Driver with Corridor function (never off)		
COR1min	Driver with Corridor function 1min (switch off after 1min.)		

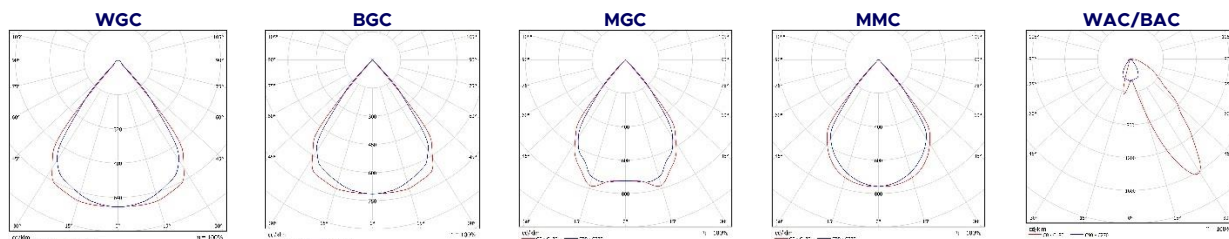

Available accessories:



Product: I-JOIN MTG KIT Etesian S/U LED
Description: "I" type join kit for connecting luminaires in-line, RAL9003S



Product: Suspension MTG KIT SUSI
Description: Suspension wire set "I" type, 1.5m adjustable, 1pcs
**note - at least 2pcs MTG KIT SUSI for one fitting required. For exact quantity please refer to installation manual*



Product: CAP cable clip D6.3mm SET clear
Description: Cable and suspension wire clip set, 4pcs. For cable diameter up to 6,3mm and wire diameter 1mm



Product: CAP4, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 3x1x1.5mm², light grey/ white/ black



Product: CAP5, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 5x1x1.5mm², light grey/ white/ black



Product: CAP cable 3x0.75 2.0m clear
Description: Cable 3x0.75mm² for suspended luminaire up to 2.0 meters, transparent

Product	Length, mm	Width, mm	Height, mm	Luminaire output, lm	System power, W	System efficacy, lm/W	CRI	CCT, K	Weight, kg
Etesian U LED1x2950/1450 J118 T830 WGC LG3 LO1	1245	47	78	4122	25,5	162	80+	3000	2,9
Etesian U LED1x3600/1750 J119 T830 WGC LG3 LO2	1245	47	78	5060	32,2	157	80+	3000	2,9
Etesian U LED1x4250/2050 J120 T830 WGC LG3 LO3	1245	47	78	5964	38,5	155	80+	3000	2,9
Etesian U LED1x4900/2400 J121 T830 WGC LG3 LO4	1245	47	78	6880	45,3	152	80+	3000	2,9
Etesian U LED1x3650/1700 J122 T830 WGC LG3 LO1	1524	47	78	5085	31,8	160	80+	3000	3,5
Etesian U LED1x4500/2100 J123 T830 WGC LG3 LO2	1524	47	78	6241	39,7	157	80+	3000	3,5
Etesian U LED1x5300/2500 J124 T830 WGC LG3 LO3	1524	47	78	7356	48,0	153	80+	3000	3,5
Etesian U LED1x6150/2850 J125 T830 WGC LG3 LO4	1524	47	78	8545	56,1	152	80+	3000	3,5
Etesian U LED1x5850/2850 J126 T830 WGC LG3 LO1	2424	47	78	8243	49,9	165	80+	3000	5,5
Etesian U LED1x7200/3500 J127 T830 WGC LG3 LO2	2424	47	78	10120	62,3	162	80+	3000	5,5
Etesian U LED1x8450/4100 J128 T830 WGC LG3 LO3	2424	47	78	11928	75,3	158	80+	3000	5,5
Etesian U LED1x9750/4750 J129 T830 WGC LG3 LO4	2424	47	78	13761	88,8	155	80+	3000	5,5
Etesian U LED1x7300/3400 J130 T830 WGC LG3 LO1	2982	47	78	10169	61,6	165	80+	3000	6,7
Etesian U LED1x9000/4200 J131 T830 WGC LG3 LO2	2982	47	78	12483	77,7	161	80+	3000	6,7
Etesian U LED1x10600/4950 J132 T830 WGC LG3 LO3	2982	47	78	14713	94,0	157	80+	3000	6,7
Etesian U LED1x12300/5700 J133 T830 WGC LG3 LO4	2982	47	78	17092	111,1	154	80+	3000	6,7
Etesian U LED1x2950/1450 J118 T840 WGC LG3 LO1	1245	47	78	4335	25,5	170	80+	4000	2,9
Etesian U LED1x3600/1750 J119 T840 WGC LG3 LO2	1245	47	78	5322	32,2	165	80+	4000	2,9
Etesian U LED1x4250/2050 J120 T840 WGC LG3 LO3	1245	47	78	6273	38,5	163	80+	4000	2,9
Etesian U LED1x4900/2400 J121 T840 WGC LG3 LO4	1245	47	78	7236	45,3	160	80+	4000	2,9
Etesian U LED1x3650/1700 J122 T840 WGC LG3 LO1	1524	47	78	5348	31,8	168	80+	4000	3,5
Etesian U LED1x4500/2100 J123 T840 WGC LG3 LO2	1524	47	78	6565	39,7	165	80+	4000	3,5
Etesian U LED1x5300/2500 J124 T840 WGC LG3 LO3	1524	47	78	7737	48,0	161	80+	4000	3,5
Etesian U LED1x6150/2850 J125 T840 WGC LG3 LO4	1524	47	78	8989	56,1	160	80+	4000	3,5
Etesian U LED1x5850/2850 J126 T840 WGC LG3 LO1	2424	47	78	8670	49,9	174	80+	4000	5,5
Etesian U LED1x7200/3500 J127 T840 WGC LG3 LO2	2424	47	78	10644	62,3	171	80+	4000	5,5
Etesian U LED1x8450/4100 J128 T840 WGC LG3 LO3	2424	47	78	12546	75,3	167	80+	4000	5,5
Etesian U LED1x9750/4750 J129 T840 WGC LG3 LO4	2424	47	78	14473	88,8	163	80+	4000	5,5
Etesian U LED1x7300/3400 J130 T840 WGC LG3 LO1	2982	47	78	10695	61,6	174	80+	4000	6,7
Etesian U LED1x9000/4200 J131 T840 WGC LG3 LO2	2982	47	78	13129	77,7	169	80+	4000	6,7
Etesian U LED1x10600/4950 J132 T840 WGC LG3 LO3	2982	47	78	15475	94,0	165	80+	4000	6,7
Etesian U LED1x12300/5700 J133 T840 WGC LG3 LO4	2982	47	78	17977	111,1	162	80+	4000	6,7
Etesian U LED1x2700/1450 J118 T830 BGC LG3 LO1	1245	47	78	3909	25,5	153	80+	3000	2,9
Etesian U LED1x3350/1750 J119 T830 BGC LG3 LO2	1245	47	78	4799	32,2	149	80+	3000	2,9
Etesian U LED1x3900/2050 J120 T830 BGC LG3 LO3	1245	47	78	5656	38,5	147	80+	3000	2,9
Etesian U LED1x4500/2400 J121 T830 BGC LG3 LO4	1245	47	78	6525	45,3	144	80+	3000	2,9
Etesian U LED1x3400/1700 J122 T830 BGC LG3 LO1	1524	47	78	4818	31,8	152	80+	3000	3,5
Etesian U LED1x4150/2100 J123 T830 BGC LG3 LO2	1524	47	78	5914	39,7	149	80+	3000	3,5
Etesian U LED1x4900/2500 J124 T830 BGC LG3 LO3	1524	47	78	6971	48,0	145	80+	3000	3,5
Etesian U LED1x5700/2850 J125 T830 BGC LG3 LO4	1524	47	78	8097	56,1	144	80+	3000	3,5
Etesian U LED1x5400/2850 J126 T830 BGC LG3 LO1	2424	47	78	7817	49,9	157	80+	3000	5,5
Etesian U LED1x6650/3500 J127 T830 BGC LG3 LO2	2424	47	78	9597	62,3	154	80+	3000	5,5
Etesian U LED1x7800/4100 J128 T830 BGC LG3 LO3	2424	47	78	11312	75,3	150	80+	3000	5,5
Etesian U LED1x9000/4750 J129 T830 BGC LG3 LO4	2424	47	78	13050	88,8	147	80+	3000	5,5
Etesian U LED1x6750/3400 J130 T830 BGC LG3 LO1	2982	47	78	9636	61,6	156	80+	3000	6,7
Etesian U LED1x8300/4200 J131 T830 BGC LG3 LO2	2982	47	78	11829	77,7	152	80+	3000	6,7
Etesian U LED1x9750/4950 J132 T830 BGC LG3 LO3	2982	47	78	13942	94,0	148	80+	3000	6,7
Etesian U LED1x11350/5700 J133 T830 BGC LG3 LO4	2982	47	78	16195	111,1	146	80+	3000	6,7

Product	Length, mm	Width, mm	Height, mm	Luminaire output, lm	System power, W	System efficacy, lm/W	CRI	CCT, K	Weight, kg
Etesian U LED1x2700/1450 J118 T840 BGC LG3 LO1	1245	47	78	4110	25,5	161	80+	4000	2,9
Etesian U LED1x3350 1750 J119 T840 BGC LG3 LO2	1245	47	78	5046	32,2	157	80+	4000	2,9
Etesian U LED1x3900 2050 J120 T840 BGC LG3 LO3	1245	47	78	5948	38,5	154	80+	4000	2,9
Etesian U LED1x4500 2400 J121 T840 BGC LG3 LO4	1245	47	78	6861	45,3	151	80+	4000	2,9
Etesian U LED1x3400 1700 J122 T840 BGC LG3 LO1	1524	47	78	5067	31,8	159	80+	4000	3,5
Etesian U LED1x4150 2100 J123 T840 BGC LG3 LO2	1524	47	78	6220	39,7	157	80+	4000	3,5
Etesian U LED1x4900 2500 J124 T840 BGC LG3 LO3	1524	47	78	7331	48,0	153	80+	4000	3,5
Etesian U LED1x5700 2850 J125 T840 BGC LG3 LO4	1524	47	78	8516	56,1	152	80+	4000	3,5
Etesian U LED1x5400 2850 J126 T840 BGC LG3 LO1	2424	47	78	8221	49,9	165	80+	4000	5,5
Etesian U LED1x6650 3500 J127 T840 BGC LG3 LO2	2424	47	78	10093	62,3	162	80+	4000	5,5
Etesian U LED1x7800 4100 J128 T840 BGC LG3 LO3	2424	47	78	11896	75,3	158	80+	4000	5,5
Etesian U LED1x9000 4750 J129 T840 BGC LG3 LO4	2424	47	78	13724	88,8	155	80+	4000	5,5
Etesian U LED1x6750 3400 J130 T840 BGC LG3 LO1	2982	47	78	10133	61,6	164	80+	4000	6,7
Etesian U LED1x8300 4200 J131 T840 BGC LG3 LO2	2982	47	78	12440	77,7	160	80+	4000	6,7
Etesian U LED1x9750 4950 J132 T840 BGC LG3 LO3	2982	47	78	14663	94,0	156	80+	4000	6,7
Etesian U LED1x11350 5700 J133 T840 BGC LG3 LO4	2982	47	78	17032	111,1	153	80+	4000	6,7
Etesian U LED1x2950/1450 J118 T830 MGC LG3 LO1	1245	47	78	4244	25,5	166	80+	3000	2,9
Etesian U LED1x3600/1750 J119 T830 MGC LG3 LO2	1245	47	78	5210	32,2	162	80+	3000	2,9
Etesian U LED1x4250/2050 J120 T830 MGC LG3 LO3	1245	47	78	6140	38,5	159	80+	3000	2,9
Etesian U LED1x4900/2400 J121 T830 MGC LG3 LO4	1245	47	78	7083	45,3	156	80+	3000	2,9
Etesian U LED1x3650/1700 J122 T830 MGC LG3 LO1	1524	47	78	5237	31,8	165	80+	3000	3,5
Etesian U LED1x4500/2100 J123 T830 MGC LG3 LO2	1524	47	78	6428	39,7	162	80+	3000	3,5
Etesian U LED1x5300/2500 J124 T830 MGC LG3 LO3	1524	47	78	7576	48,0	158	80+	3000	3,5
Etesian U LED1x6150/2850 J125 T830 MGC LG3 LO4	1524	47	78	8802	56,1	157	80+	3000	3,5
Etesian U LED1x5850/2850 J126 T830 MGC LG3 LO1	2424	47	78	8487	49,9	170	80+	3000	5,5
Etesian U LED1x7200/3500 J127 T830 MGC LG3 LO2	2424	47	78	10419	62,3	167	80+	3000	5,5
Etesian U LED1x8450/4100 J128 T830 MGC LG3 LO3	2424	47	78	12281	75,3	163	80+	3000	5,5
Etesian U LED1x9750/4750 J129 T830 MGC LG3 LO4	2424	47	78	14166	88,8	160	80+	3000	5,5
Etesian U LED1x7300/3400 J130 T830 MGC LG3 LO1	2982	47	78	10473	61,6	170	80+	3000	6,7
Etesian U LED1x9000/4200 J131 T830 MGC LG3 LO2	2982	47	78	12857	77,7	165	80+	3000	6,7
Etesian U LED1x10600/4950 J132 T830 MGC LG3 LO3	2982	47	78	15153	94,0	161	80+	3000	6,7
Etesian U LED1x12300/5700 J133 T830 MGC LG3 LO4	2982	47	78	17605	111,1	158	80+	3000	6,7
Etesian U LED1x2950/1450 J118 T840 MGC LG3 LO1	1245	47	78	4463	25,5	175	80+	4000	2,9
Etesian U LED1x3600/1750 J119 T840 MGC LG3 LO2	1245	47	78	5479	32,2	170	80+	4000	2,9
Etesian U LED1x4250/2050 J120 T840 MGC LG3 LO3	1245	47	78	6458	38,5	168	80+	4000	2,9
Etesian U LED1x4900/2400 J121 T840 MGC LG3 LO4	1245	47	78	7450	45,3	164	80+	4000	2,9
Etesian U LED1x3650/1700 J122 T840 MGC LG3 LO1	1524	47	78	5508	31,8	173	80+	4000	3,5
Etesian U LED1x4500/2100 J123 T840 MGC LG3 LO2	1524	47	78	6762	39,7	170	80+	4000	3,5
Etesian U LED1x5300/2500 J124 T840 MGC LG3 LO3	1524	47	78	7970	48,0	166	80+	4000	3,5
Etesian U LED1x6150/2850 J125 T840 MGC LG3 LO4	1524	47	78	9259	56,1	165	80+	4000	3,5
Etesian U LED1x5850/2850 J126 T840 MGC LG3 LO1	2424	47	78	8927	49,9	179	80+	4000	5,5
Etesian U LED1x7200/3500 J127 T840 MGC LG3 LO2	2424	47	78	10959	62,3	176	80+	4000	5,5
Etesian U LED1x8450/4100 J128 T840 MGC LG3 LO3	2424	47	78	12917	75,3	172	80+	4000	5,5
Etesian U LED1x9750/4750 J129 T840 MGC LG3 LO4	2424	47	78	14901	88,8	168	80+	4000	5,5
Etesian U LED1x7300/3400 J130 T840 MGC LG3 LO1	2982	47	78	11016	61,6	179	80+	4000	6,7
Etesian U LED1x9000/4200 J131 T840 MGC LG3 LO2	2982	47	78	13523	77,7	174	80+	4000	6,7
Etesian U LED1x10600/4950 J132 T840 MGC LG3 LO3	2982	47	78	15939	94,0	170	80+	4000	6,7
Etesian U LED1x12300/5700 J133 T840 MGC LG3 LO4	2982	47	78	18518	111,1	167	80+	4000	6,7

Product	Length, mm	Width, mm	Height, mm	Luminaire output, lm	System power*, W	System efficacy*, lm/W	CRI *	CCT*, K	Weight, kg
Etesian U LED1x2950/1450 J118 T830 MMC LG3 LO1	1245	47	78	4183	25,5	164	80+	3000	2,9
Etesian U LED1x3600/1750 J119 T830 MMC LG3 LO2	1245	47	78	5135	32,2	159	80+	3000	2,9
Etesian U LED1x4250/2050 J120 T830 MMC LG3 LO3	1245	47	78	6052	38,5	157	80+	3000	2,9
Etesian U LED1x4900/2400 J121 T830 MMC LG3 LO4	1245	47	78	6982	45,3	154	80+	3000	2,9
Etesian U LED1x3650/1700 J122 T830 MMC LG3 LO1	1524	47	78	5161	31,8	162	80+	3000	3,5
Etesian U LED1x4500/2100 J123 T830 MMC LG3 LO2	1524	47	78	6334	39,7	160	80+	3000	3,5
Etesian U LED1x5300/2500 J124 T830 MMC LG3 LO3	1524	47	78	7466	48,0	156	80+	3000	3,5
Etesian U LED1x6150/2850 J125 T830 MMC LG3 LO4	1524	47	78	8674	56,1	155	80+	3000	3,5
Etesian U LED1x5850/2850 J126 T830 MMC LG3 LO1	2424	47	78	8365	49,9	168	80+	3000	5,5
Etesian U LED1x7200/3500 J127 T830 MMC LG3 LO2	2424	47	78	10270	62,3	165	80+	3000	5,5
Etesian U LED1x8450/4100 J128 T830 MMC LG3 LO3	2424	47	78	12105	75,3	161	80+	3000	5,5
Etesian U LED1x9750/4750 J129 T830 MMC LG3 LO4	2424	47	78	13963	88,8	157	80+	3000	5,5
Etesian U LED1x7300/3400 J130 T830 MMC LG3 LO1	2982	47	78	10321	61,6	168	80+	3000	6,7
Etesian U LED1x9000/4200 J131 T830 MMC LG3 LO2	2982	47	78	12670	77,7	163	80+	3000	6,7
Etesian U LED1x10600/4950 J132 T830 MMC LG3 LO3	2982	47	78	14933	94,0	159	80+	3000	6,7
Etesian U LED1x12300/5700 J133 T830 MMC LG3 LO4	2982	47	78	17348	111,1	156	80+	3000	6,7
Etesian U LED1x2950/1450 J118 T840 MMC LG3 LO1	1245	47	78	4399	25,5	173	80+	4000	2,9
Etesian U LED1x3600/1750 J119 T840 MMC LG3 LO2	1245	47	78	5401	32,2	168	80+	4000	2,9
Etesian U LED1x4250/2050 J120 T840 MMC LG3 LO3	1245	47	78	6366	38,5	165	80+	4000	2,9
Etesian U LED1x4900/2400 J121 T840 MMC LG3 LO4	1245	47	78	7343	45,3	162	80+	4000	2,9
Etesian U LED1x3650/1700 J122 T840 MMC LG3 LO1	1524	47	78	5428	31,8	171	80+	4000	3,5
Etesian U LED1x4500/2100 J123 T840 MMC LG3 LO2	1524	47	78	6663	39,7	168	80+	4000	3,5
Etesian U LED1x5300/2500 J124 T840 MMC LG3 LO3	1524	47	78	7854	48,0	164	80+	4000	3,5
Etesian U LED1x6150/2850 J125 T840 MMC LG3 LO4	1524	47	78	9124	56,1	163	80+	4000	3,5
Etesian U LED1x5850/2850 J126 T840 MMC LG3 LO1	2424	47	78	8798	49,9	176	80+	4000	5,5
Etesian U LED1x7200/3500 J127 T840 MMC LG3 LO2	2424	47	78	10801	62,3	173	80+	4000	5,5
Etesian U LED1x8450/4100 J128 T840 MMC LG3 LO3	2424	47	78	12731	75,3	169	80+	4000	5,5
Etesian U LED1x9750/4750 J129 T840 MMC LG3 LO4	2424	47	78	14687	88,8	165	80+	4000	5,5
Etesian U LED1x7300/3400 J130 T840 MMC LG3 LO1	2982	47	78	10855	61,6	176	80+	4000	6,7
Etesian U LED1x9000/4200 J131 T840 MMC LG3 LO2	2982	47	78	13326	77,7	172	80+	4000	6,7
Etesian U LED1x10600/4950 J132 T840 MMC LG3 LO3	2982	47	78	15707	94,0	167	80+	4000	6,7
Etesian U LED1x12300/5700 J133 T840 MMC LG3 LO4	2982	47	78	18248	111,1	164	80+	4000	6,7

*Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25 C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Available options:

T830	Colour temperature 3000K, CRI 80+
T840	Colour temperature 4000K, CRI 80+
WGC	White gloss reflector with clear lens
BGC	Black gloss reflector with clear lens
WMC	White matt reflector with clear lens
BMC	Black matt reflector with clear lens
MGC	Metallic mirror finish reflector with clear lens
MMC	Metallic matt reflector with clear lens
LG3	Luminaire fits to LG3 requirements (with direct/indirect light distribution)
LO1...4	Light output level 1 to 4
DALI	Driver with DALI interface and switch-control dimming
DALIsep	Driver with DALI interface and with possibility to control down and up light separately
EAIRB-M	Master luminaire with integrated smart sensor and driver with Bluetooth communication and grouping possibilities for lighting control

*note - for EAIRB, EAIRB-M options ingress protection IP20

*note - the EAIRB sensor is positioned in the end of the luminaire for lengths up to 2000mm, and in the middle of the luminaire for lengths over 2000mm

EAIRB-S Slave luminaire with integrated EAIR type driver for lighting control

*note - max system size 1x EAIRB-M + 3x EAIRB-S.

*note - max wire length from EAIRB-M to last EAIRB-S - 11m.


*note - EAIRB options are not applicable for model: J133

BLT Integrated wireless control unit and driver for lighting control via mobile device (via Bluetooth)

COR Driver with Corridor function (never off)

COR1min Driver with Corridor function 1min (switch off after 1 min.)

COR30min	Driver with Corridor function 30min (switch off after 30 min.)
*note - COR options are not applicable for models: J132; J133	
PULL	Pull switch device, on/off
PULLDIM	Pull switch device and driver with switch-control dimming
PIR	Integrated PIR sensor with on-off control
EM3	Emergency version 3 hours
EM3B	Emergency version 3 hours (best available technology)
EM3A	Emergency version equipped with an autonomous testing system, 3 hours
EM3D	Emergency version 3 hours with DALI interface
*note - EM options are not compatible with some of COR and EAIRB models.	
Please check before placing an order	
Lsep	Option that enables to control (on/off) Down and up lights separately
CBF3-2.0m clear	Cable 3x0.75mm ² for suspended luminaire up to 2.0 meters, transparent
CBF3-3.0m clear	Cable 3x0.75mm ² for suspended luminaire up to 3.0 meters, transparent
CBF5-2.0m clear	Cable 5x0.75mm ² for suspended luminaire up to 2.0 meters, transparent
CBF5-3.0m clear	Cable 5x0.75mm ² for suspended luminaire up to 3.0 meters, transparent
1LIN I-join L	Luminaire designed to in-line connection with join element - end/first luminaire (joint element not included). Through wired 3x1.5 mm ² with two push-in terminal blocks
1LIN I-join LL	Luminaire designed to in-line connection with join element - intermediate luminaire (joint element not included). Through wired 3x1.5 mm ² with two push-in terminal blocks
RAL	RAL colour

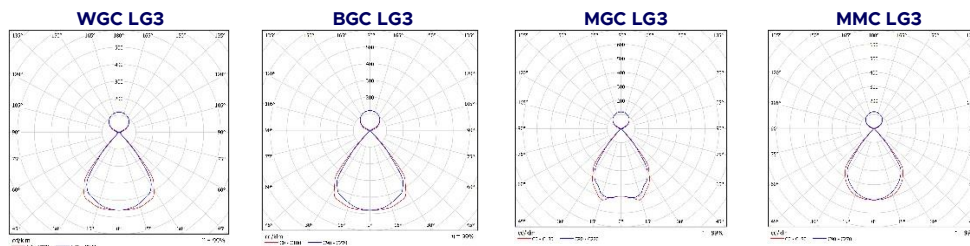

Available accessories:



Product: I-JOIN MTG KIT Etesian U LED LG3
Description: "I" type join kit for connecting luminaires in-line, RAL9003S



Product: Suspension MTG KIT SUSI
Description: Suspension wire set "I" type, 1.5m adjustable, 1pcs
**note - at least 2pcs MTG KIT SUSI for one fitting required. For exact quantity please refer to installation manual*



Product: CAP cable clip D6.3mm SET clear
Description: Cable and suspension wire clip set, 4pcs. For cable diameter up to 6,3mm and wire diameter 1mm



Product: CAP4, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 3x1x1.5mm², light grey/ white/ black



Product: CAP5, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 5x1x1.5mm², light grey/ white/ black



Product: CAP cable 3x0.75 2.0m clear
Description: Cable 3x0.75mm² for suspended luminaire up to 2.0 meters, transparent