



QUADRO LED

Aluminium Profile Luminaires



Images for the product family and options:

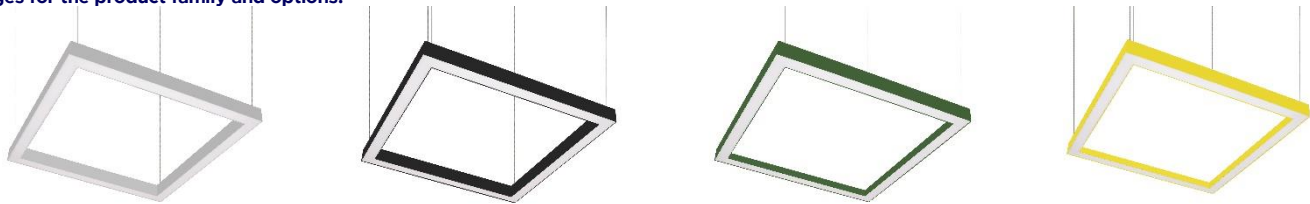

Description:

Suspended decorative LED luminaire
 Light distribution type: direct
 Optical system: opal polycarbonate diffuser/ matt micro-prismatic polycarbonate diffuser, low glare
 Housing: aluminium
 Colour: grey (RAL9006), white (RAL9003), black (RAL9005)

General data:

Mains voltage: 220-240V, 0/50/60Hz
 LED lifetime, h: 100000/L80B50
 SDCM: 3
 Protection class IEC: I
 Ingress protection code: IP40
 Mechanical impact resistance: IK05
 Operating temperature range, °C: ta 0...+35

Installation:

Suspended (wire, cable and cap to be ordered separately). Cable 2.0m, 3x0.75mm², transparent

Environment:

Indoor

Application:

Office, education, hotel, retail, public place


Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI * (Ra)	CCT*, K	Weight, kg
Quadro LED1x3250 J344 T830 OP LT80	620	620	68	3070	24,8	124	80+	3000	4,6
Quadro LED1x4400 J345 T830 OP LT80	620	620	68	4183	34,7	121	80+	3000	4,6
Quadro LED1x6050 J346 T830 OP LT80	620	620	68	5750	50,9	113	80+	3000	4,6
Quadro LED1x3250 J344 T840 OP LT80	620	620	68	3214	24,8	130	80+	4000	4,6
Quadro LED1x4400 J345 T840 OP LT80	620	620	68	4380	34,7	126	80+	4000	4,6
Quadro LED1x6050 J346 T840 OP LT80	620	620	68	6021	50,9	118	80+	4000	4,6
Quadro LED1x4550 D906 T840 OP LT80	900	900	68	4542	36,4	125	80+	4000	6,6
Quadro LED1x6200 D907 T840 OP LT80	900	900	68	6181	52,5	118	80+	4000	6,6
Quadro LED1x8400 D908 T840 OP LT80	900	900	68	8383	77,8	108	80+	4000	6,6
Quadro LED1x6100 D909 T840 OP LT80	1180	1180	68	6056	48,5	125	80+	4000	8,8
Quadro LED1x8250 D910 T840 OP LT80	1180	1180	68	8241	70	118	80+	4000	8,8
Quadro LED1x11200 D911 T840 OP LT80	1180	1180	68	11177	103,7	108	80+	4000	8,8
Quadro LED1x2850 J344 T830 DPRZ LT80	620	620	68	2681	24,8	108	80+	3000	4,6
Quadro LED1x3850 J345 T830 DPRZ LT80	620	620	68	3654	34,7	105	80+	3000	4,6
Quadro LED1x5300 J346 T830 DPRZ LT80	620	620	68	5023	50,9	99	80+	3000	4,6
Quadro LED1x2850 J344 T840 DPRZ LT80	620	620	68	2807	24,8	113	80+	4000	4,6
Quadro LED1x3850 J345 T840 DPRZ LT80	620	620	68	3825	34,7	110	80+	4000	4,6
Quadro LED1x5300 J346 T840 DPRZ LT80	620	620	68	5258	50,9	103	80+	4000	4,6
Quadro LED1x4550 D906 T840 DPRZ LT80	900	900	68	3765	36,4	103	80+	4000	6,6
Quadro LED1x6200 D907 T840 DPRZ LT80	900	900	68	5124	52,5	98	80+	4000	6,6
Quadro LED1x8400 D908 T840 DPRZ LT80	900	900	68	6949	77,8	89	80+	4000	6,6
Quadro LED1x6100 D909 T840 DPRZ LT80	1180	1180	68	5020	48,5	103	80+	4000	8,8
Quadro LED1x8250 D910 T840 DPRZ LT80	1180	1180	68	6832	70	98	80+	4000	8,8
Quadro LED1x11200 D911 T840 DPRZ LT80	1180	1180	68	9265	103,7	89	80+	4000	8,8

*Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Available options:

T830	Colour temperature 3000K, CRI 80+	CBF2-2.0m clear	Cable 2x0.75mm ² for suspended luminaire up to 2.0 meters, transparent
T840	Colour temperature 4000K, CRI 80+	CBF2-3.0m clear	Cable 2x0.75mm ² for suspended luminaire up to 3.0 meters, transparent
OP LT80	Opal diffuser with high light transmittance	RAL	RAL colour
DPRZ LT80	De-glaring micro-prismatic diffuser with matt light scattering layer		

DALI Driver with DALI interface
 *note - DALI option in models D909, D910, D911 uses 2 DALI addresses

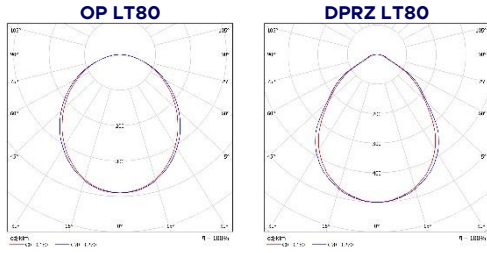

Available accessories:



Product: Suspension MTG KIT SUSI
Description: Suspension wire set "I" type, 1.5m adjustable, 1pcs
**note - 4pcs MTG SUSI KIT for 1 luminaire required*



Product: CAP4, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 3x1x1.5mm², light grey/ white/ black



Product: CAP cable 3x0.75 2.0m, clear
Description: Cable 3x0.75mm² for suspended luminaire up to 2.0 meters, transparent



Product: CAP5, light grey/ white/ black
Description: Square decorative metal cap for hiding cable inlet with suspension wire attachment point, push-in terminals 5x1x1.5mm², light grey/ white/ black



Product: CAP cable clip D6.3mm SET clear
Description: Cable and suspension wire clip set, 4pcs. For cable diameter up to 6,3mm and wire diameter 1mm

Applications:

