



AURIGA C LED

Downlights



Description:

Recessed mounted LED downlight
 Light distribution type: direct
 Optical system: clear glass diffuser, faceted aluminium reflector, 40°, UGR≤19/ opal PMMA diffuser/ translucent micro-prismatic PMMA diffuser
 Housing: aluminium
 Colour: white (RAL9016)

General data:

Mains voltage: 220-240V, 0/50/60Hz
 LED lifetime, h: 75000/L80B50
 SDCM: 3
 Protection class IEC: II
 Ingress protection code: IP44
 Mechanical impact resistance: IK04
 Operating temperature range, °C: ta 0...+35

Installation:

In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 2x1x1.5mm²

Environment:

Indoor

Application:


Office, education, hotel, corridor, bathroom, retail, showroom, exhibition, public place

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI* (Ra)	CCT*, K	Weight, kg
Auriga C LED1x1800 D336 T830 CLR	195	195	140	1715	13,5	127	80+	3000	0,8
Auriga C LED1x2400 D337 T830 CLR	195	195	140	2330	18,7	125	80+	3000	0,8
Auriga C LED1x3200 D338 T830 CLR	195	195	140	3137	26,5	118	80+	3000	0,8
Auriga C LED1x1800 D336 T840 CLR	195	195	140	1813	13,5	134	80+	4000	0,8
Auriga C LED1x2400 D337 T840 CLR	195	195	140	2463	18,7	132	80+	4000	0,8
Auriga C LED1x3200 D338 T840 CLR	195	195	140	3316	26,5	125	80+	4000	0,8
Auriga C LED1x1800 D336 T830 OP LT80	195	195	140	1569	13,5	116	80+	3000	0,8
Auriga C LED1x2400 D337 T830 OP LT80	195	195	140	2132	18,7	114	80+	3000	0,8
Auriga C LED1x3200 D338 T830 OP LT80	195	195	140	2870	26,5	108	80+	3000	0,8
Auriga C LED1x1800 D336 T840 OP LT80	195	195	140	1658	13,5	123	80+	4000	0,8
Auriga C LED1x2400 D337 T840 OP LT80	195	195	140	2253	18,7	120	80+	4000	0,8
Auriga C LED1x3200 D338 T840 OP LT80	195	195	140	3033	26,5	114	80+	4000	0,8
Auriga C LED1x1800 D336 T830 MPRZ LT92	195	195	140	1548	13,5	115	80+	3000	0,8
Auriga C LED1x2400 D337 T830 MPRZ LT92	195	195	140	2103	18,7	112	80+	3000	0,8
Auriga C LED1x3200 D338 T830 MPRZ LT92	195	195	140	2831	26,5	107	80+	3000	0,8
Auriga C LED1x1800 D336 T840 MPRZ LT92	195	195	140	1636	13,5	121	80+	4000	0,8
Auriga C LED1x2400 D337 T840 MPRZ LT92	195	195	140	2223	18,7	119	80+	4000	0,8
Auriga C LED1x3200 D338 T840 MPRZ LT92	195	195	140	2993	26,5	113	80+	4000	0,8

*Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Available options:

T830	Colour temperature 3000K, CRI 80+	EM3A	Emergency version equipped with an autonomous testing system, 3 hours
T840	Colour temperature 4000K, CRI 80+	EM3D	Emergency version 3 hours with DALI interface
T930	Colour temperature 3000K, CRI 90+	WIE3-0.5m	3-pole "Wieland - gesis classic" type or compatible connector with 0.5m cable
T940	Colour temperature 4000K, CRI 90+	WIE5D-0.5m	5-pole DALI "Wieland - gesis classic" type or compatible connector with 0.5m cable
OP LT80	Opal diffuser with high light transmittance	QBX3-0.1m	3-pole quick connection box on 0.1m cable, Push-in terminal, 3x2x2.5mm ²
MPRZ LT92	Translucent micro-prismatic diffuser with high light transmittance	Europlug-1.5m	2-pole "Europlug" type plug with 2x1.0mm ² 1.5m cable
OP TP(a)	TP(a) rated thermoplastic opal diffuser	Europlug-3.0m	2-pole "Europlug" type plug with 2x1.0mm ² 3.0m cable
T927 NATURAL	Colour temperature 2700K, CRI 95+ NATURAL	RAL	RAL colour
T930 NATURAL	Colour temperature 3000K, CRI 95+ NATURAL		
T940 NATURAL	Colour temperature 4000K, CRI 95+ NATURAL		
DALI	Driver with DALI interface and switch-control dimming		
EM3	Emergency version 3 hours		
EM3B	Emergency version 3 hours (best available technology)		

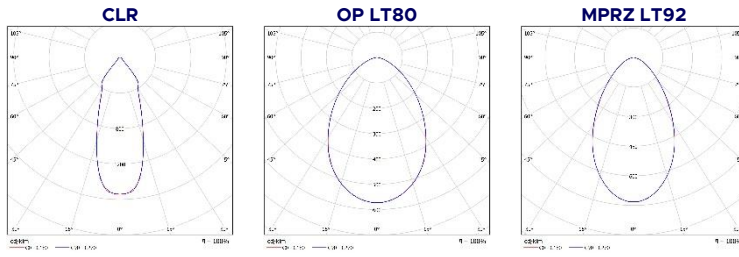

Available accessories:



Product: Auriga C LED diffusor 135mm OP LT80
Description: Opal diffuser with high light transmittance



Product: Auriga C LED diffusor 135mm MPRZ LT92
Description: Translucent micro-prismatic diffuser with high light transmittance